

KAMN40 SERIES

AC - DC POWER MODULE
28 ~ 40W UL / cUL / TUV / CE



FEATURES

- AC/DC POWER MODULE
- UNIVERSAL INPUT 85 ~ 265 VAC
- HIGH EFFICIENCY UP TO 87%
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 2 YEARS WARRANTY
- MEDICAL SAFETY APPROVED
- LOW LEAKAGE CURRENT



MODEL LIST

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
Single Output Models							
KAMN4003	85 ~ 265 VAC	28 WATTS	+ 3.3 VDC	8500 mA	76%	78%	7000 μ F
KAMN4005	85 ~ 265 VAC	40 WATTS	+ 5 VDC	8000 mA	80%	82%	7000 μ F
KAMN4012	85 ~ 265 VAC	40.8 WATTS	+ 12 VDC	3400 mA	84%	86%	7000 μ F
KAMN4015	85 ~ 265 VAC	40.5 WATTS	+ 15 VDC	2700 mA	85%	87%	7000 μ F
KAMN4024	85 ~ 265 VAC	40.8 WATTS	+ 24 VDC	1700 mA	85%	87%	3500 μ F
Dual Output Models							
KAMN4012D	85 ~ 265 VAC	40.8 WATTS	\pm 12 VDC	\pm 1700 mA	83%	85%	\pm 7000 μ F
KAMN4015D	85 ~ 265 VAC	40.5 WATTS	\pm 15 VDC	\pm 1350 mA	84%	86%	\pm 7000 μ F
KAMN40512D	85 ~ 265 VAC	40 WATTS	+5 / + 12 VDC	+5A / + 1.25A	81%	83%	7000 μ F
KAMN40524D	85 ~ 265 VAC	39 WATTS	+5 / + 24 VDC	+3A / + 1A	81%	83%	7000 μ F

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL						
Characteristics	Conditions	min.	typ.	max.	unit	
Switching frequency	Vi nom, Io nom		65		KHz	
Isolation voltage	Input - Output	4236/6000			VAC/VDC	
Isolation resistance	Input - Output, @ 500VDC	100			M Ω	
Ambient temperature (l)	Operating at Vi nom, Io nom	-40		+ 71	°C	
Case temperature	Operating at Vi nom, Io nom			+ 85	°C	
Derating	Vi nom, +6l to + 71°C			2.5	% / °C	
Storage temperature	Non operational	-40		+ 100	°C	
Relative humidity	Vi nom, Io nom	20		95	% RH	
Temperature coefficient	Vi nom, Io min			\pm 0.03	% / °C	

NOTE1 : Pls refer to DERATING CURVE.

www.chinfa.com

sales@chinfa.com

2009.12.11



CHINFA ELECTRONICS IND. CO., LTD.
ISO 9001 Certified

PI

KAMN40 SERIES

AC - DC POWER MODULE

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
MTBF	Bellcore issue 6 @40°C, GB 3.3V, 5V, 512D & 524D models		606000		Hours
		12V, 12D & 15D models		615000	Hours
		15V & 24V models		623000	Hours
Altitude during operation				3000	m
Dimension		L89 x W63.5 x H25			mm
Cooling	Free air convection				

INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Rated input voltage	lo nom	100		240	VAC
Input voltage range	Ta min ... Ta max, lo nom	AC in	85	265	VAC
		DC in	120	375	VDC
Rated input current	Vi : 115 / 230 VAC, lo nom		0.75-0.45	0.8-0.4	A
Line frequency	Vi nom, lo nom	47		63	Hz
Inrush current	Vi : 115 / 230 VAC, lo nom			20/40	A
Leakage current	Normal condition			100	μA
	Single fault condition			300	μA

OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, lo nom	single output models		± 1	%
		dual output models		± 2	%
		524D model		± 4	%
Minimum load	Vi nom	single output models	0		%
		dual output models (each output)	20		%
Line regulation	lo nom, Vi min ... Vi max			± 1	%
Load regulation	Vi nom, lo min ... lo nom	single output models		± 1	%
		dual output models		± 2	%
Cross regulation (Dual model)	Asymmetrical load 20% / 100% FL			± 6	%
Hold up time	Vi : 115 / 230 VAC, lo nom	20/100			ms
Turn on time	Vi nom, lo nom			1000	ms
Rise time	Vi nom, lo nom			150	ms
Fall time	Vi nom, lo nom			150	ms
Transient recovery time	Vi nom, I ~ 0.5 lo nom			1	ms
Ripple & noise	Vi nom, lo nom, BW = 20MHz			50	mV
External trim ADJ. Range ²⁾ (for single output only)	lo = 5% ... 100%	-10		+10	%
Efficiency	Vi nom, lo nom, Po / Pi	Up to 87%, See model list and typ efficiency curve			

NOTE 2 : Pls refer to Fig 1 & Table 1 for connection and resistance recommended.

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse		T2A / 250VAC internal			
Internal surge voltage protection	IEC 61000-4-5	Varistor			
Output short circuit		Hiccup mode			
Rated over load protection	Vi nom (see typ current limited curve)	120		160	%

KAMN40 SERIES

AC - DC POWER MODULE

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

APPROVALS AND STANDARDS



UL / cUL	UL 60950-1, UL 60601-1 Recognized
TUV	EN 60950-1, EN 60601-1
CE	EN 60601-1-2, EN 55011, EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3 EN 61000-6-2, EN 55024, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5 EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61204-3
Vibration resistance	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 axes, 6 Faces, 3 times for each Face)

PHYSICAL CHARACTERISTICS

Case size	89 x 63.5 x 25mm (3.5 x 2.5 x 0.98 inches)
Case material	Plastic
Weight	250g
Potting material	Epoxy

MECHANISM & PIN CONFIGURATION

mm [inch]

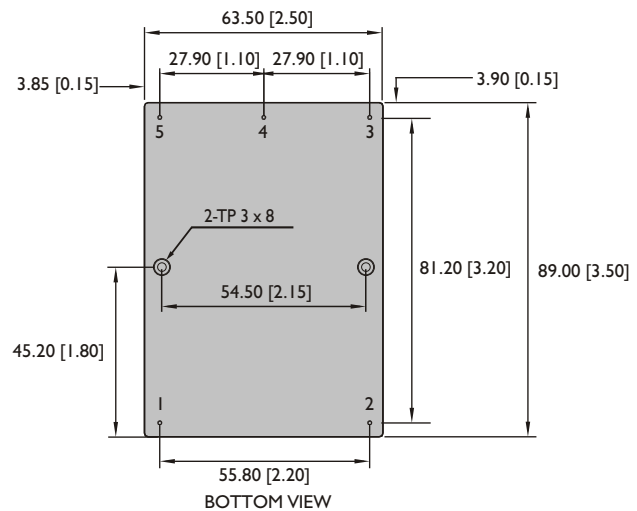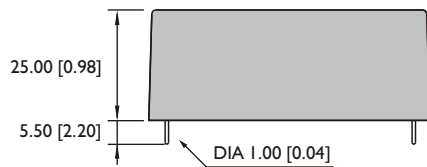

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


PIN ASSIGNMENT

GENERAL


PIN NO.	1	2	3	4	5
SINGLE	AC IN	AC IN	Vo +	Vo -	Trim
DUAL	12D, 15D	AC IN	AC IN	Vo +	com
	512D	AC IN	AC IN	+5V	+12V
	524D	AC IN	AC IN	+5V	+24V

CIRCUIT SCHEMATIC

• Block diagram for KAMN40 series with single output

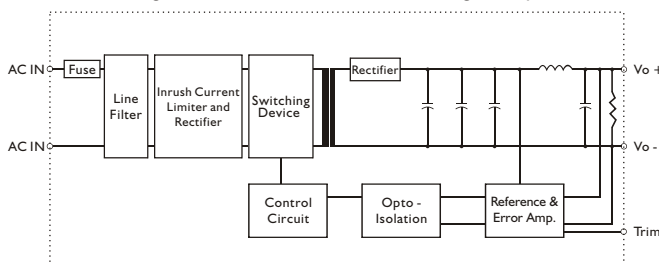

• Block diagram for KAMN40 series with dual output

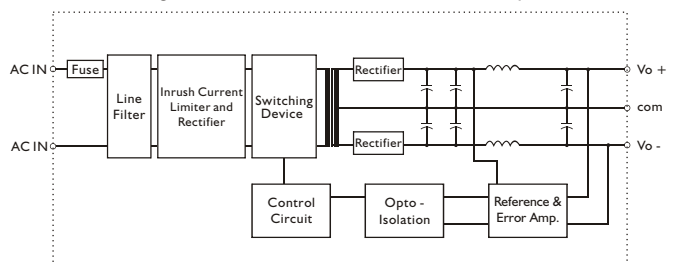


KAMN40 SERIES


AC - DC POWER MODULE

CIRCUIT SCHEMATIC



• Block diagram for KAMN40512D & KAMN40524D

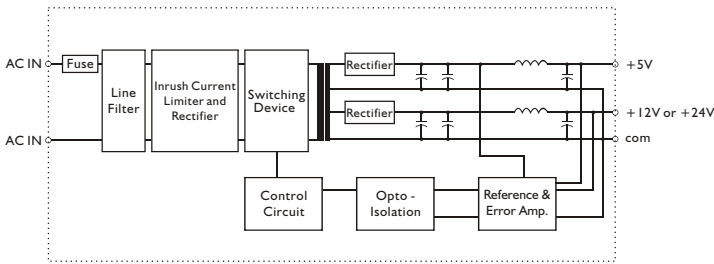

TYP. CURRENT LIMITED CURVE

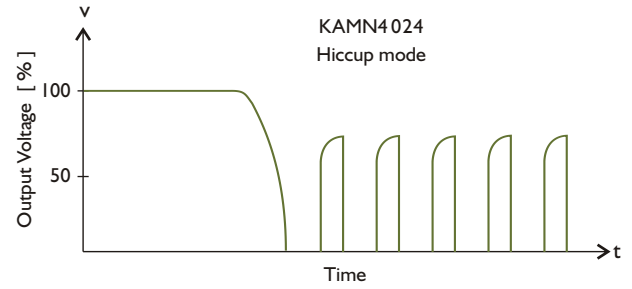

DERATING CURVE

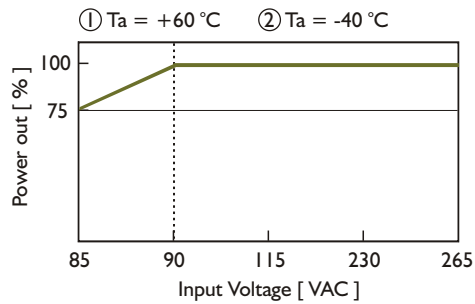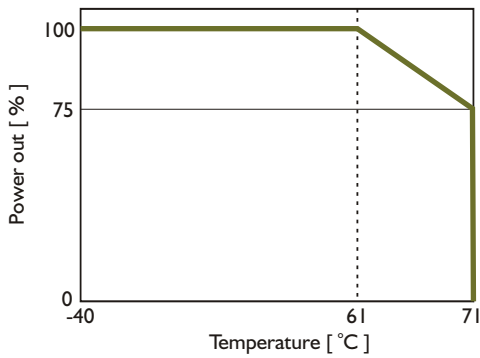

TYP. EFFICIENCY CURVE

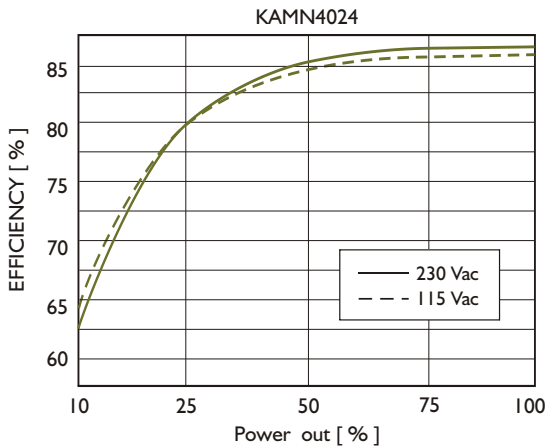


Fig. 1 Trim connection (For single output only)

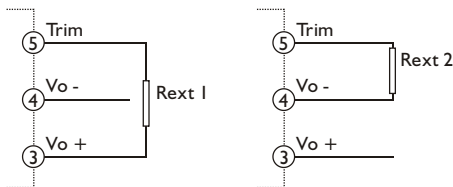


Table 1 Typical resistor values for various output voltage adjustment settings and max continuous power

Type	Rext 1		Rext 2		Max continuous power
	Vo nom -5%	Vo nom -10%	Vo nom +5%	Vo nom +10%	
KAMN4003	20KΩ	5.1KΩ	3KΩ	1KΩ	28 W
KAMN4005	5.1KΩ	1KΩ	6.8KΩ	2KΩ	40 W
KAMN4012	39KΩ	20KΩ	10KΩ	0Ω	40.8 W
KAMN4015	180KΩ	56KΩ	30KΩ	5.1KΩ	40.5 W
KAMN4024	150KΩ	51KΩ	8.2KΩ	0Ω	40.8 W